

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 July 2004 (29.07.2004)

PCT

(10) International Publication Number  
**WO 2004/062699 A1**

(51) International Patent Classification<sup>7</sup>: **A61L 9/12**,  
9/04, 9/12

(21) International Application Number:  
PCT/GB2004/000067

(22) International Filing Date: 12 January 2004 (12.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0300641.8 11 January 2003 (11.01.2003) GB

(71) Applicant (for all designated States except US):  
**RECKITT BENCKISER (UK) LIMITED** [GB/GB];  
103-105 Bath Road, Slough, Berkshire SL1 3UH (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BEDFORD, David**  
[GB/GB]; Reckitt Benckiser (UK) Limited, Dansom  
Lane, Hull HU8 7DS (GB). **ROBINSON, Paul, William**  
[GB/GB]; Reckitt Benckiser (UK) Limited, Dansom Lane,  
Hull HU8 7DS (GB).

(74) Agents: **MCKNIGHT, John, Crawford et al.**; Reckitt  
Benckiser plc, Group Patents Department, Dansom Lane,  
Hull HU8 7DS (GB).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(81) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: AIR FRESHING DEVICE

(57) Abstract: A device for perfuming, deodorising or sanitising air or enclosed spaces which comprises: a. an anhydrous gel element formed by cross-linking a functionalised liquid polymer with a crosslinking agent in the presence of a non-aqueous perfume, deodorising or sanitising base; and b. separate timing means for proving an end-of-life indication.

**BEST AVAILABLE COPY**

WO 2004/062699 A1

## AIR FRESHENING DEVICE

The present invention devices useful for the perfuming,  
5 deodorising or sanitising of air with an end-of-life  
indicator.

Devices for perfuming, deodorising or sanitising of air are  
known. For example, air fresheners are now found in many  
10 rooms of houses or offices or in enclosed spaces such as  
vehicles. Recently devices comprising a high proportion of  
fragrance in a gel have been marketed under the trade mark  
"Crystal Air" by Reckitt Benckiser Plc. Such devices are  
also described in, for example, US-A-5,780,527, GB-A-  
15 2,363,717 and WO 00/24434. Typically the air freshener,  
deodoriser or sanitising element comprises above 50 wt%  
active component in a matrix of a crosslinked,  
functionalised liquid polymer held in a device such as a  
plastic or grooved glass substrate. As the device is used,  
20 the active component is released into the atmosphere. After  
a certain time, the active component is substantially used  
up, or is released at an insufficient rate.

For many types of air freshener, there is an effective end-  
25 of-life indicator. For example, with an electrically driven  
device in which a liquid composition is heated and  
evaporated, it can easily be seen when the liquid reservoir  
is empty. A perfuming candle clearly needs replacing when  
it has burnt away. It is difficult for a user of a device  
30 comprising a high proportion of an active component in a  
gelled matrix to determine when it needs replacing since  
there is no clear end-of-life indicator.

WO 00/24434 states that the end point cue is provided by the shrinkage of the gel material within the recess or recesses, which is perfectly visible. It also states that there is  
5 often cracking or tearing of the gel material. However, we have found that the shrinkage or cracking of the gel is not always a reliable indicator of end-of-life. Shrinkage is a continuous process, and it cannot easily be determined when the gel has sufficiently shrunk that the device should be  
10 replaced. Furthermore, cracking does not always occur, and when it does, the time of cracking is not necessarily the time that the device ceases to effectively fulfil its function.

15 The present invention provides a device for perfuming, deodorising or sanitising air or enclosed spaces which comprises:

a. an anhydrous gel element formed by cross-linking a functionalised liquid polymer with a crosslinking agent in  
20 the presence of a non-aqueous perfume, deodorising or sanitising base; and

b. separate timing means for proving an end-of-life indication.

25 The anhydrous gel element is described, for example, in US-A-5,780,527, GB-A-2,363,717 and WO 00/24434, herein incorporated by reference. By the term "functionalised liquid polymer" we mean a material which is liquid at room temperature and which has a viscosity of not more than 5 Pas  
30 at 25 °C, preferably from 0.25 to 1.0 Pas. Thus, for example, the functionalised liquid polymer may be selected

from maleinised polybutadiene, maleinised polyisoprene or a copolymer of ethylene and maleic anhydride and the crosslinking agent contains at least two complementary functional groups. Examples of functionalised liquid  
5 polymers are commercially available from Revertex Ltd and sold under the trade mark LITHENE. Particularly preferred are LITHENE N4-9000 10MA, LITHENE N4-B-10MA and LITHENE N4-5000-10MA. Examples of crosslinking agents are  
10 alkylpropyldiamines having an ethoxylated or propoxylated higher aliphatic chain such as those sold under the trade mark DICRODAMET by Croda Chemicals Ltd, ethoxylated or propoxylated primary fatty amines sold under the trade mark CRODAMET and polyoxyalkylenediamines such as those sold under the trade mark JEFFAMINE by Huntsman Corporation.

15

The non-aqueous perfume, deodorising or sanitising base generally constitutes 50 to 95wt%, preferably 60 to 90wt%, more preferably 70 to 85wt%, of the anhydrous gel element. The gel element may also comprise other components such as  
20 dyes or plasticisers.

The timing means provides the user of the device with an indication as to when the device ceases to operate effectively and must be replaced or refilled. Any timing  
25 means separate from the anhydrous gel element can be provided. In other words, the anhydrous gel element is not itself used to provide an end-of-life indication.

The timing means desirably provides an end-of-life  
30 indication 14 to 60 days from the date that the device is initiated, preferably 28 to 40 days. The duration will, of

course, depend on various factors such as the composition of the anhydrous gel element, the physical form of the device and the location of the device when it is used. Desirably the time to the end-of-life indication is set by the  
5 . manufacturer of the device, but it is also possible for a user to set the duration if suitable adjustment means are provided.

The timing means is preferably actuated when the device  
10 itself is initially actuated by a single operation. However, it is possible for separate actuation means to be provided for the device and for the timing means.

Any timing means can be provided so long as it shows the  
15 desired end-of-life indication. For example, a visible or audio signal can be provided.


In a first embodiment, a further gel element can be provided. The further gel element has a different  
20 composition from the anhydrous gel element, in that it is specifically designed to shrink. By anchoring the further gel element at one end, the shrinkage of the element to the anchor point can be seen. The end-of-life indication is provided when a certain degree of shrinkage is observed, for  
25 example by the gel shrinking past an indicator such as a line embossed on the device. Desirably the further gel element is not perfumed, but it is preferably coloured to provide an attractive and highly visible appearance. It may take the form of a simple line, or a more complex shape  
30 could be used, for example a circle or circular element around the anhydrous gel element to provide a timing means

reminiscent of a stopwatch face. Such an element comprises a composition able to shrink over time, for example of gelatin or carrageenan gum.

5 In a second embodiment, a composition which compacts, changes state or dissolves can be provided. For example, a composition can be in the form of discrete particles, preferably spherical particles. The particles can be held in a reservoir, preferably a substantially vertical  
10 reservoir, and slowly decay by evaporation of water and eventual coalescence at the bottom of the reservoir. The end-of-life indication can be when discrete particles are no longer visible, or when the level of particles reaches an indicated level.

15

Any composition fulfilling the above requirement can be used, but of particular benefit is a copolymer of a substituted or unsubstituted maleic anhydride with a substituted or unsubstituted alkene. Examples of  
20 substituted or unsubstituted maleic anhydrides are those of formula:



wherein  $R_1$  and  $R_2$ , which may be identical or different, are each hydrogen or alkyl, especially  $C_1$ - $C_6$  alkyl. Preferably  
5  $R_1$  and  $R_2$  are both hydrogen.

Examples of suitable alkenes are straight branched  $C_2$ - $C_{12}$  alkenes especially  $C_2$ - $C_6$  alkenes, and in particular  $C_4$  alkenes such as isobutylene.

10

The copolymer is preferred in the form of salt, especially an alkali metal salt such as a sodium salt.

A particularly preferred copolymer is isobutylene-maleic  
15 anhydride sodium copolymer obtainable from Kuraray, Osaka, Japan.

In order to obtain particles containing water the copolymer particles are simply added to water and allowed to swell.  
20 Ordinarily the swelling is allowed to proceed to completion, but controlled swelling can be used by adding a restricted amount of water or by removing the particles before swelling is completed. In this way the end-of-life timing can be controlled, It can also be controlled by an appropriate  
25 choice of copolymer, or by incorporating a water-permeable membrane between the timing means and the atmosphere to retard the loss of water from the particles.

In a third embodiment an audio signal can be provided, for  
30 example by an electrical timing circuit, preferably powered by a battery, connected to a loudspeaker. An example of

this embodiment is the same as the first or second  
embodiments above except that the composition is conducting,  
by inclusion of conducting particles such as carbon black,  
graphite or a metal. Once the composition passes a  
5 particular point, for example by shrinkage of a gel or  
dissolution of particles, a circuit could be broken. For  
example, two electrodes can be provided, and once the  
circuit between them is broken, a signal can be generated.

10 Examples of two devices constructed in accordance with the  
present invention will now be described with reference to  
the accompanying drawings, in which:

Figure 1 is a plan view of an example of the first  
15 embodiment of a device of the present invention; and

Figure 2 is a plan view an example of a second embodiment of  
a device of the present invention.

20 Figure 1 illustrates an adapted version of the Crystal Air  
(RTM) product sold by Reckitt Benckiser Plc.

This device comprises a glass body 1, one face of which is  
provided with a pattern of grooves 2 in which a fragranced  
25 gel 3 is deposited. The grooves are open to the ambient air  
such that the gel fragrances the air.

This device has now been adapted to have a further groove 4  
separate from and running around the periphery of the  
30 pattern of grooves 2. This further groove 4 is filled with  
a second gel 5 which extends along most of the length of the



groove 4, but does not extend around the entire groove. The gel 5 is anchored in position at a first end by anchoring means such as a spike 9 and has an opposing free end 7. A marker 8 is provided adjacent to the groove 4 at a certain distance behind the free end 7.

In use when the device is activated, for example by removing a protective foil from the back of the device which covers both the pattern of grooves 2 and the further groove 4, or by removing the entire device from an air-tight container, the second gel 5 begins to shrink, such that the free end moves towards the marker 8. Eventually, the free end 7 will reach the marker 8 to provide an end-of-life indication.

In the second example shown in Figure 2, the same fragranced gel 3 is used as in the first example, but this time in a reservoir on top of the upper end of a housing 10. The gel is held in a plurality of grooves 11 to allow fragancing in a similar way as in the first example

The housing has a vertically extending chamber 12 which is externally visible, either by the housing itself being transparent or through a transparent window.

The chamber 12 is filled with a stack of spherical balls 13. These are made of a material which is designed to decay when exposed to ambient air. For example, they may be impregnated with water which evaporates over time such that the resulting structure is incapable of supporting its own mass and collapses, or the balls shrink as water is released.

Thus, a given period of time after the device is activated, for example by removing the device from an air tight container, the balls 13 will collapse into a small space at the bottom of the chamber 12. A marker 14 is preferably provided towards the bottom of the chamber 12 such that, the end-of-life is indicated by the balls collapsing below the marker 14. Although Figure 2 shows the chamber being transparent beneath the marker 14, this need not necessarily be the case, and the end-of-life may be indicated by the balls 13 disappearing from view.

Claims

1. A device for perfuming, deodorising or sanitising air or enclosed spaces which comprises:
  - 5 a. an anhydrous gel element formed by cross-linking a functionalised liquid polymer with a crosslinking agent in the presence of a non-aqueous perfume, deodorising or sanitising base; and
  - b. separate timing means for proving an end-of-life  
10 indication.
2. A device according to claim 1 wherein the functionalised liquid polymer is selected from maleinised polybutadiene, maleinised polyisoprene or a copolymer of  
15 ethylene and maleic anhydride and the crosslinking agent contains at least two complementary functional groups.
3. A device according to claim 1 or 2 wherein the non-aqueous perfume, deodorising or sanitising base constitutes  
20 from 60 to 95wt% of the gel element.
4. A device according to any one of the preceding claims wherein the timing means comprises an additional element which visibly shrinks over the intended lifetime of the  
25 device.
5. A device according to claim 4 wherein the additional element comprises a gel which shrinks at a greater rate than said anhydrous gel element.

6. A device according to any one of claims 1 to 3 wherein the additional element comprises particles which shrink, compact or dissolve.

5 7. A device according to claim 6 wherein the particles comprise a maleic anhydride-isobutylene copolymer.

8. A device according to any one of the preceding claims wherein the timing means provides an end-of-life indication  
10 after from 28 to 40 days use of the device.

9. A device according to any one of the preceding claims which comprises actuating means which, when actuated, activates the device to release the perfuming, deodorising  
15 or sanitising substance and activates the timing means.

10. A device according to claim 9 wherein the actuating means comprises an impermeable foil which covers both the perfuming, deodorising or sanitising substance and the  
20 timing means.

FIG. 2.


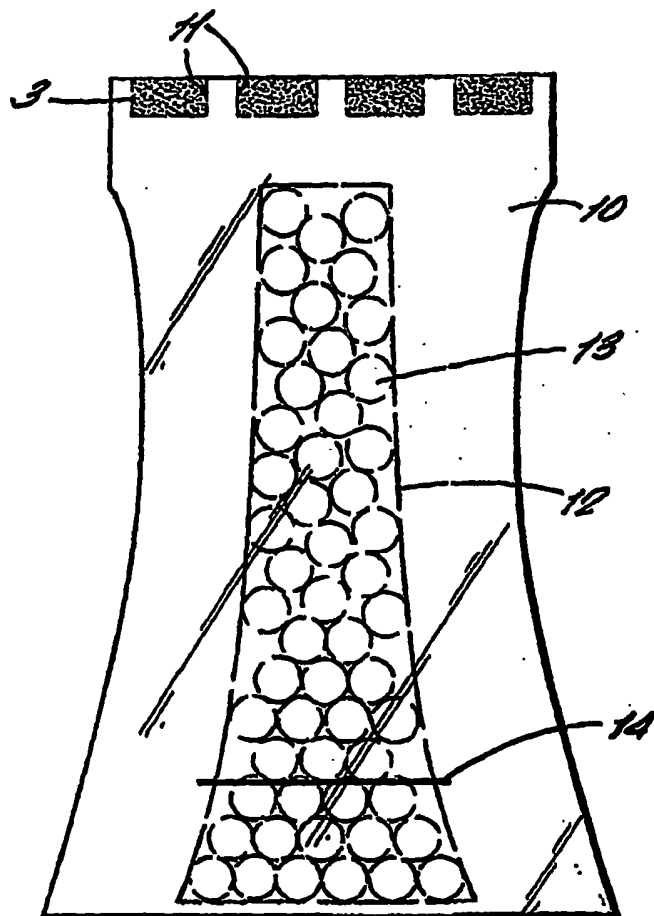


FIG. 1.

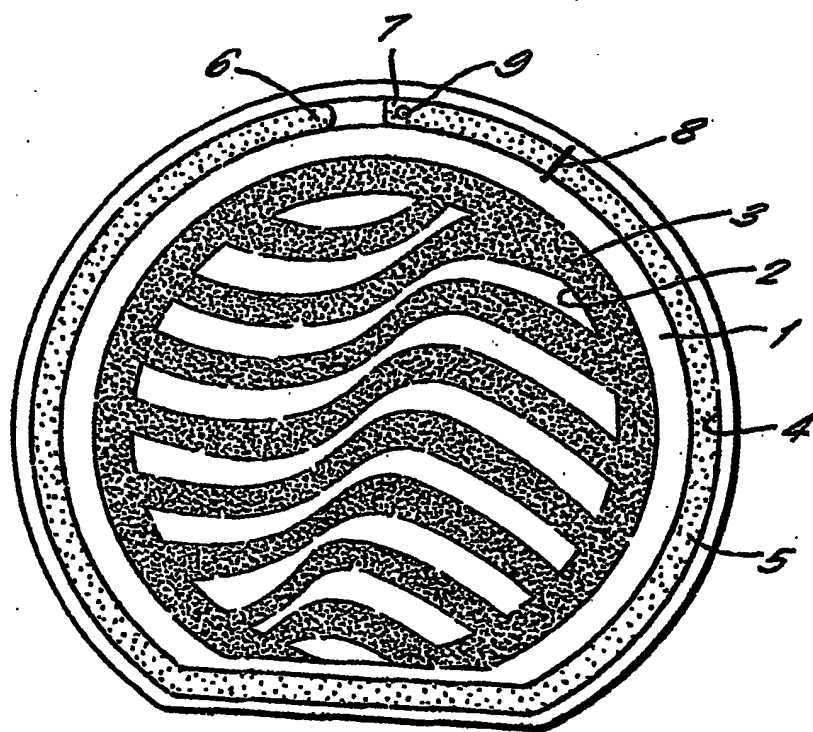

## INTERNATIONAL SEARCH REPORT

GB2004/000067

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 A61L9/12 A61L9/04 A61L9/012

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 A61L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
|------------|--|-----------------------|
| Y          | WO 00/24434 A (LEARY NICHOLAS O ; RECKITT & COLMANN PROD LTD (GB))<br>4 May 2000 (2000-05-04)<br>cited in the application<br>page 5, line 30 - page 6, line 5<br>page 12, lines 1-14 | 1-10                  |
| Y          | US 4 921 636 A (TRAAS PETRUS C)<br>1 May 1990 (1990-05-01)<br>column 4, line 45 - column 5, line 42  | 1-10                  |
| Y          | US 3 104 816 A (AIRKEM INC.)<br>24 September 1963 (1963-09-24)<br>column 1, lines 9-70; figures  | 1-10                  |
| Y          | DE 32 39 511 A (JELLINEK JOSEF DIPL CHEM DR) 26 April 1984 (1984-04-26)<br>page 3, line 1 - page 4, line 15; figures   | 1-10                  |
|            | -----<br>-/--  |                       |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*Z\* document member of the same patent family

Date of the actual completion of the international search

24 May 2004

Date of mailing of the international search report

28/05/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax (+31-70) 340-3016

Authorized officer

Persichini, C

# INTERNATIONAL SEARCH REPORT

/GB2004/000067

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
|------------|--|-----------------------|
| A          | <p>US 5 060 858 A (SANTINI THOMAS F)<br/> 29 October 1991 (1991-10-29)<br/> column 4, line 51 - column 5, line 8;<br/> figures 1-6</p> | 1-10                  |



## INTERNATIONAL SEARCH REPORT

GB2004/000067

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---|---------------------|----------------------------|---------------------|
| WO 0024434                                | A | 04-05-2000          | AT 242645 T                | 15-06-2003          |
|   |   |                     | AU 757804 B2               | 06-03-2003          |
|   |   |                     | AU 6350999 A               | 15-05-2000          |
|   |   |                     | BR 9914685 A               | 24-07-2001          |
|   |   |                     | CA 2348079 A1              | 04-05-2000          |
|   |   |                     | CN 1324253 T               | 28-11-2001          |
|   |   |                     | DE 19983665 T0             | 08-11-2001          |
|   |   |                     | DE 69908796 D1             | 17-07-2003          |
|   |   |                     | DE 69908796 T2             | 01-04-2004          |
|   |   |                     | DK 1121159 T3              | 14-07-2003          |
|   |   |                     | EP 1304126 A1              | 23-04-2003          |
|   |   |                     | EP 1121159 A1              | 08-08-2001          |
|   |   |                     | ES 2201785 T3              | 16-03-2004          |
|   |   |                     | ES 2192974 A1              | 16-10-2003          |
|   |   |                     | WO 0024434 A1              | 04-05-2000          |
|   |   |                     | GB 2350300 A               | 29-11-2000          |
|   |   |                     | JP 2002528425 T            | 03-09-2002          |
|   |   |                     | PL 347362 A1               | 08-04-2002          |
|   |   |                     | PT 1121159 T               | 31-10-2003          |
|   |   |                     | US 6631852 B1              | 14-10-2003          |
| US 4921636                                | A | 01-05-1990          | NL 8503456 A               | 16-07-1987          |
|   |   |                     | AT 52352 T                 | 15-05-1990          |
|   |   |                     | AU 588946 B2               | 28-09-1989          |
|   |   |                     | AU 6619686 A               | 18-06-1987          |
|   |   |                     | BR 8606204 A               | 29-09-1987          |
|   |   |                     | CA 1282285 C               | 02-04-1991          |
|   |   |                     | DE 3670708 D1              | 31-05-1990          |
|   |   |                     | DK 602586 A                | 17-06-1987          |
|   |   |                     | EP 0227167 A1              | 01-07-1987          |
|   |   |                     | GR 3000654 T3              | 27-09-1991          |
|   |   |                     | JP 2603827 B2              | 23-04-1997          |
|   |   |                     | JP 62145276 A              | 29-06-1987          |
|   |   |                     | MX 168523 B                | 28-05-1993          |
|   |   |                     | NO 865065 A                | 17-06-1987          |
|   |   |                     | PT 83945 A , B             | 01-01-1987          |
|   |   |                     | ZA 8609298 A               | 29-07-1987          |
| US 3104816                                | A | 24-09-1963          | NONE                       |                     |
| DE 3239511                                | A | 26-04-1984          | DE 3239511 A1              | 26-04-1984          |
| US 5060858                                | A | 29-10-1991          | CA 2111457 A1              | 04-03-1993          |
|   |   |                     | EP 0649314 A1              | 26-04-1995          |
|   |   |                     | WO 9303775 A1              | 04-03-1993          |
|   |   |                     | AU 659103 B2               | 11-05-1995          |
|   |   |                     | JP 6509480 T               | 27-10-1994          |

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**